


B301

Hand Taper Pin Reamer

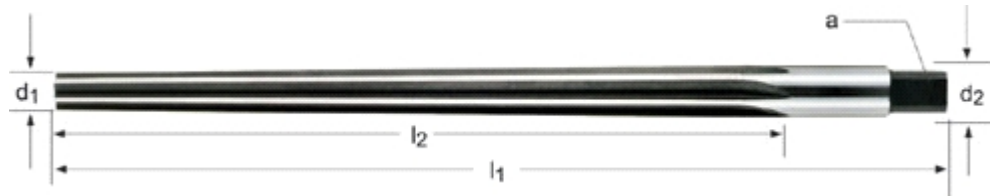

nom R	d1 R mm	l1 mm	l2 mm	z	□ a mm	d2 R mm	e-code		USD
1/16	1.10	51	25	4	1.2	1.63	B3011/16	1)	132.00
5/64	1.50	51	25	4	1.6	2.03	B3015/64	1)	132.00
3/32	1.75	57	32	4	2.0	2.41	B3013/32	1)	121.00
7/64	2.03	64	38	4	2.2	2.82	B3017/64	1)	121.00
1/8	2.30	70	44	4	2.5	3.23	B3011/8	1)	121.00
9/64	2.64	73	48	4	2.8	3.63	B3019/64	1)	108.00
5/32	2.95	76	51	4	3.1	4.01	B3015/32	1)	104.00
11/64	3.23	89	57	4	3.6	4.42	B30111/64	1)	101.00
3/16	3.50	102	70	4	4.0	4.95	B3013/16	1)	101.00
7/32	4.13	102	70	6	4.5	5.59	B3017/32	1)	101.00
1/4	4.64	117	86	6	5.0	6.43	B3011/4	2)	112.00
9/32	5.23	143	105	6	5.6	7.42	B3019/32	2)	121.00
5/16	5.84	143	105	6	6.3	8.03	B3015/16	2)	108.00
11/32	6.43	152	114	6	7.1	8.81	B30111/32	2)	148.00
3/8	7.03	165	127	6	8.0	9.68	B3013/8	2)	121.00
13/32	7.42	191	146	6	8.0	10.46	B30113/32	2)	188.00
7/16	8.21	191	146	6	9.0	11.25	B3017/16	2)	164.00
1/2	9.41	210	165	6	10.0	12.85	B3011/2	2)	240.00

1) Limit of tolerance +0.0030

2) Limit of tolerance +0.0050