


C126

Slot Drill

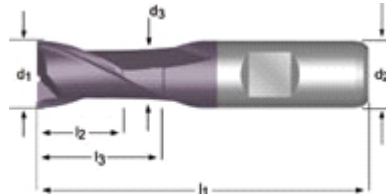

d ₁ R mm	d ₂ R _{h6} mm	l ₂ mm	l ₁ mm	z	l ₃ mm	d ₃ R mm	e-code	USD
1.00	6	2.5	47	2	-	-	C1261.0	64.80
1.50	6	3	47	2	-	-	C1261.5	58.70
2.00	6	4	48	2	-	-	C1262.0	42.40
2.50	6	5	49	2	-	-	C1262.5	43.50
3.00	6	5	49	2	-	-	C1263.0	40.00
3.50	6	6	50	2	-	-	C1263.5	37.60
4.00	6	7	51	2	-	-	C1264.0	40.15
4.50	6	7	51	2	-	-	C1264.5	43.65
5.00	6	8	52	2	-	-	C1265.0	39.60
5.50	6	8	52	2	-	-	C1265.5	48.10
6.00	6	8	52	2	-	-	C1266.0	39.95
6.50	10	10	60	2	-	-	C1266.5	60.70
7.00	10	10	60	2	-	-	C1267.0	57.90
7.50	10	10	60	2	-	-	C1267.5	60.90
8.00	10	11	61	2	-	-	C1268.0	52.00
8.50	10	11	61	2	-	-	C1268.5	66.50
9.00	10	11	61	2	-	-	C1269.0	63.00
9.50	10	11	61	2	-	-	C1269.5	68.70
10.00	10	13	63	2	22.5	9.5	C12610.0	57.00
10.50	12	13	70	2	-	-	C12610.5	81.60
11.00	12	13	70	2	-	-	C12611.0	74.40
11.50	12	13	70	2	-	-	C12611.5	76.70
12.00	12	16	73	2	27.5	11.5	C12612.0	67.30
12.50	12	16	73	2	27.5	11.5	C12612.5	92.10
13.00	12	16	73	2	27.5	11.5	C12613.0	89.60
14.00	12	16	73	2	27.5	11.5	C12614.0	84.30
15.00	12	16	73	2	27.5	11.5	C12615.0	99.80

d ₁ R mm	d ₂ R _{h6} mm	l ₂ mm	l ₁ mm	z	l ₃ mm	d ₃ R mm	e-code		USD
16.00	16	19	79	2	30.5	15.5	C12616.0		101.00
18.00	16	19	79	2	30.5	15.5	C12618.0		114.00
20.00	20	22	88	2	37.5	19.5	C12620.0		132.00
22.00	20	22	88	2	37.5	19.5	C12622.0		162.00
24.00	25	26	102	2	45.5	23.5	C12624.0		215.00
25.00	25	26	102	2	45.5	24.5	C12625.0		209.00
30.00	25	26	102	2	45.5	24.5	C12630.0		263.00

¹⁾diameter tolerance h10

²⁾slot not in P9 tolerance