




Solid Carbide Grinding Burrs

Submicron Grain Carbide

Standard 45° lead chamfer

Head diameter tolerance $+0.002'' -0.002''$ ($+0.051\text{mm} -0.051\text{mm}$)

* - Carbide shank brazed to carbide head

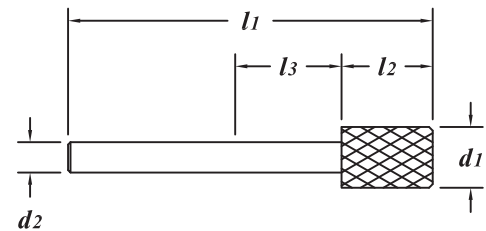

EDP#	$d1$ † Diameter		$d2$ Shank Diameter	$l1$ Overall Length	$l2$ Flute Length	$l3$ Neck Length	1-11	12-24	25-49	50-100
	Decimal	Metric								
76010	.0480		1/8"	1-1/2"	1/8"	1/2"	15.61	14.93	14.25	13.57
75010	.0625	1/16"	1/8"	1-1/2"	1/8"	3/8"	15.61	14.93	14.25	13.57
76020	.0790		1/8"	1-1/2"	1/8"	1/2"	15.61	14.93	14.25	13.57
75020	.0938	3/32"	1/8"	1-1/2"	5/32"	3/8"	15.61	14.93	14.25	13.57
76030	.1100		1/8"	1-1/2"	5/32"	5/8"	15.61	14.93	14.25	13.57
75030	.1250	1/8"	1/8"	1-1/2"	3/16"	5/8"	14.82	14.18	13.53	12.89
76040	.1410		3/16"	2"	3/16"	3/4"	21.97	21.01	20.06	19.10
75040	.1562	5/32"	3/16"	2"	1/4"	3/4"	21.97	21.01	20.06	19.10
76050	.1720		3/16"	2"	7/32"	3/4"	21.97	21.01	20.06	19.10
75050	.1875	3/16"	3/16"	2"	1/4"	3/4"	19.78	18.92	18.06	17.20
76060	.2030		1/4"	2"	1/4"	3/4"	22.67	21.68	20.70	19.71
75060	.2188	7/32"	1/4"	2"	1/4"	3/4"	22.67	21.68	20.70	19.71
76070	.2350		1/4"	2"	5/16"	3/4"	22.67	21.68	20.70	19.71
75070	.2500	1/4"	1/4"	2"	5/16"	3/4"	20.57	19.68	18.78	17.89
76080	* .3000		1/4"	2-1/2"	3/8"	-	33.22	31.78	30.33	28.89
75080	.3125	* 5/16"	1/4"	2-1/2"	3/8"	-	33.22	31.78	30.33	28.89
76090	* .3600		1/4"	2-1/2"	1/2"	-	35.44	33.90	32.36	30.82
75090	.3750	* 3/8"	1/4"	2-1/2"	1/2"	-	35.44	33.90	32.36	30.82
76100	* .4230		1/4"	2-1/2"	1/2"	-	38.58	36.91	35.23	33.55
75100	.4375	* 7/16"	1/4"	2-1/2"	1/2"	-	38.58	36.91	35.23	33.55
76110	* .4850		1/4"	2-1/2"	1/2"	-	39.73	38.01	36.28	34.55