

# WIRING INSTRUCTIONS

**TITLE**

**D-HANDLE DRILL**


**BULLETIN**

MILWAUKEE ELECTRIC TOOL CORP.

13135 WEST LISBON RD. BROOKFIELD, WIS

DATE  
MAY '85

**58-01-0248**

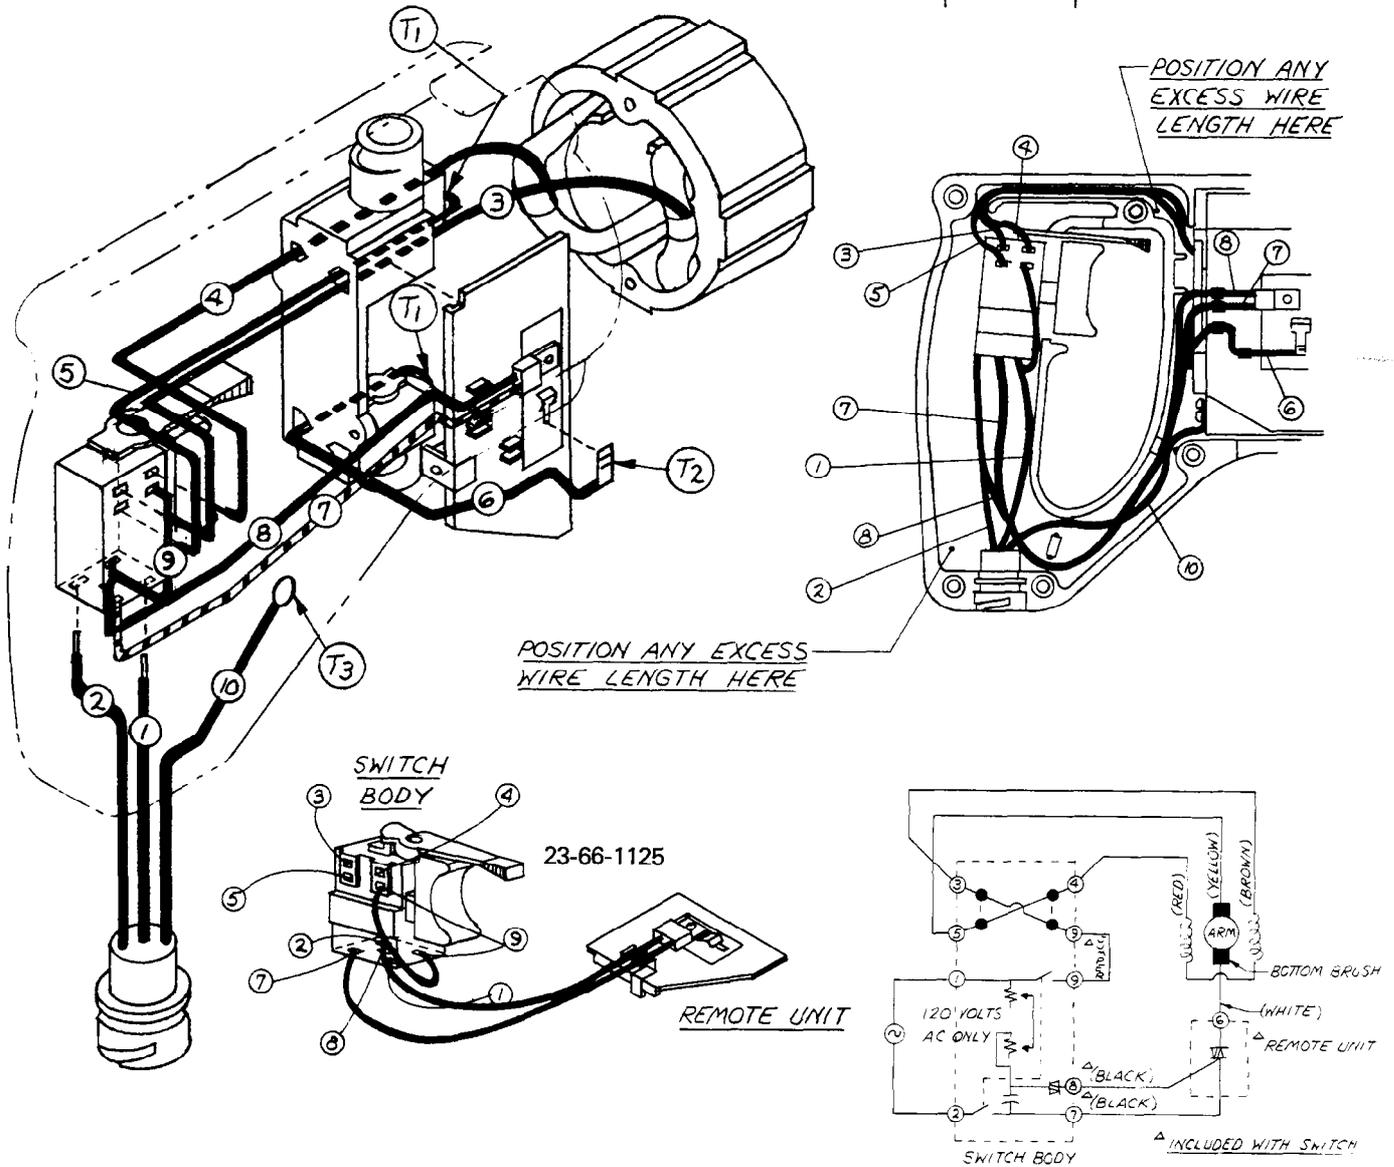

## WIRING SPECIFICATIONS

Wire No.	Wire Color	Origin or Gauge	Length	Terminals, Connectors and 1 or 2 End Wire Preparation
1	WHITE	*	—	COMPONENT OF PIN HSG. ASSY.
2	WHITE	*	—	COMPONENT OF PIN HSG. ASSY.
3	BROWN	FIELD	8-3/8"	STRIP 3/8" AND TIN
4	RED	FIELD	8-3/8"	STRIP 3/8" AND TIN
5	YELLOW	18	7-3/4"	STRIP 3/8" AND TIN/STRIP 1/4" FOR T1
6	WHITE	18	5"	STRIP 1/4" FOR T1/STRIP 3/16" FOR T2
7	BLACK	—	—	SUPPLIED WITH SWITCH
8	BLACK	—	—	SUPPLIED WITH SWITCH
9	BLACK	—	—	SUPPLIED WITH SWITCH
10	GREEN	*	—	COMPONENT OF PIN HSG. ASSY.

**NOTE:**

All leads must be held to  $\pm 1/8"$ .  
All field leads to be measured from and perpendicular to laminations.  
All lead lengths are before stripping.

### TERMINAL DESCRIPTION

Code	Part No.	Qty.
T1	22-44-0090	2
T2	23-74-0615	1
T3	23-74-0896	1

### CONNECTOR DESCRIPTION

Code	Part No.	Qty.