



EVO6100 DELUXE™ INDUSTRIAL HARD HATS

EVO6151 Deluxe™ Wheel Ratchet - Standard Brim
EVO6151 Deluxe™ with textile suspension and Revolution™ wheel ratchet. Conforming to ANSI/ISEA Z89.1-2009 Type I.



CODE	DESCRIPTION	BOX QTY
280-EV6151-10	White - Non Vented CLASS E (20,000 Volts)	10
280-EV6151-20	Yellow - Non Vented CLASS E (20,000 Volts)	10
280-EV6151-30	Green - Non Vented CLASS E (20,000 Volts)	10
280-EV6151-50	Blue - Non Vented CLASS E (20,000 Volts)	10
280-EV6151-60	Red - Non Vented CLASS E (20,000 Volts)	10
280-EV6151-80	Orange - Non Vented CLASS E (20,000 Volts)	10
280-EV6151-OR	Bright Orange - Non Vented CLASS E (20,000 Volts)	10
280-EV6151-LY	Bright Lime Yellow - Non Vented CLASS E (20,000 Volts)	10
280-EV6151V-10	White - Vented CLASS C	10
280-EV6151V-20	Yellow - Vented CLASS C	10

EVO6151 Deluxe™ Wheel Ratchet - Short Brim
EVO6151 Deluxe™ with textile suspension and Revolution™ wheel ratchet. Conforming to ANSI/ISEA Z89.1-2009 Type I.



CODE	DESCRIPTION	BOX QTY
280-EV6151S-10	White - Non Vented CLASS E (20,000 Volts)	10
280-EV6151S-20	Yellow - Non Vented CLASS E (20,000 Volts)	10
280-EV6151SV-10	White - Vented CLASS C	10
280-EV6151SV-20	Yellow - Vented CLASS C	10

EVO6131 Deluxe™ Slip Ratchet - Standard Brim
EVO6131 Deluxe™ with textile suspension and OneTouch™ slip ratchet. Conforming to ANSI/ISEA Z89.1-2009 Type I.



CODE	DESCRIPTION	BOX QTY
280-EV6131-10	White - Non Vented CLASS E (20,000 Volts)	10
280-EV6131-20	Yellow - Non Vented CLASS E (20,000 Volts)	10
280-EV6131-30	Green - Non Vented CLASS E (20,000 Volts)	10
280-EV6131-50	Blue - Non Vented CLASS E (20,000 Volts)	10
280-EV6131-60	Red - Non Vented CLASS E (20,000 Volts)	10
280-EV6131-80	Orange - Non Vented CLASS E (20,000 Volts)	10
280-EV6131-OR	Bright Orange - Non Vented CLASS E (20,000 Volts)	10
280-EV6131-LY	Bright Lime Green - Non Vented CLASS E (20,000 Volts)	10
280-EV6131V-10	White - Vented CLASS C	10
280-EV6131V-20	Yellow - Vented CLASS C	10

EVO6100™ INDUSTRIAL HARD HATS

EVO6121™ Slip Ratchet - Standard Brim
EVO6121™ with polyethylene suspension and OneTouch™ slip ratchet. Conforming to ANSI/ISEA Z89.1-2009 Type I.



CODE	DESCRIPTION	BOX QTY
280-EV6121-10	White - Non Vented CLASS E (20,000 Volts)	20
280-EV6121-20	Yellow - Non Vented CLASS E (20,000 Volts)	20
280-EV6121-30	Green - Non Vented CLASS E (20,000 Volts)	20
280-EV6121-50	Blue - Non Vented CLASS E (20,000 Volts)	20
280-EV6121-60	Red - Non Vented CLASS E (20,000 Volts)	20
280-EV6121-80	Orange - Non Vented CLASS E (20,000 Volts)	20
280-EV6121-OR	Bright Orange - Non Vented CLASS E (20,000 Volts)	20
280-EV6121-LY	Bright Lime Yellow - Non Vented CLASS E (20,000 Volts)	20

EVO6121™ Slip Ratchet - Short Brim
EVO6121™ polyethylene suspension and OneTouch™ slip ratchet. Conforming to ANSI/ISEA Z89.1-2009 Type I.



CODE	DESCRIPTION	BOX QTY
280-EV6121S-10	White - Non Vented CLASS E (20,000 Volts)	20
280-EV6121S-20	Yellow - Non Vented CLASS E (20,000 Volts)	20



LOGO™ Hard Hat PRINTING
Your Company Logo and/or details can be printed on the front, back and/or sides of the EVO6100™ Hard Hat. For further information contact your distributor.

FRONT	BACK	SIDES
W: 2.75" x H: 1.5"	W: 0.75" x 1"	W: 2.25" x H: 1"




JSP QUALITY MANAGEMENT SYSTEM
JSP's products are manufactured under its worldwide QMS (Quality Management System). This ensures proper batch control including testing and recording of each manufactured batch to the relevant ANSI & EN Standard. When specifying JSP products, Health and Safety Officers can rest assured they are fit for purpose exceeding all relevant ANSI & EN standards with batch test certification through the manufacturing process (ie not just at one point in time) and come with JSP's full technical backup and support. This is the JSP Comfort Factor.

EXCLUSIVELY DISTRIBUTED IN NORTH AMERICA BY



PROTECTIVE INDUSTRIAL PRODUCTS


26 Computer Drive East, Albany, NY 12205
(800)262-5755 email: sales@pipusa.com www.pipusa.com

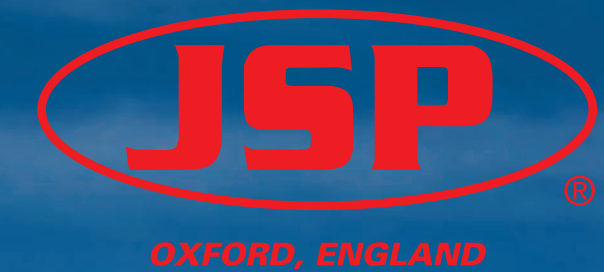

EVO6100™ HARD HAT

HEAD PROTECTION EVOLVED

PERFORMANCE ENHANCED DESIGN EXCLUSIVELY FOR THE USA





THE PERFECT BLEND OF COMFORT AND STRENGTH

The EVO6100™ Hard Hat combines a super strong shell for superior all day protection in the widest range of environments, with the comfort benefits of the new Evolution 3D Adjustment™ suspension system. EVO6100™ is a true evolution of the long established Mk2™ and Mk3™ Hard Hats, which were first launched in the 1970's. The EVO6100™ retains the JSP signature styling while incorporating developments first seen in the Mk8 Evolution®. Packed full of the latest protection technology and features such as the Evolution 3D Adjustment™ suspension system, Revolution™ Wheel Ratchet or the unique OneTouch™ Slip Ratchet, which can be adjusted using one hand in a single swift movement.



TOUGH HDPE SHELL

In tests the EVO6100™ proved far tougher than the EN397 & ANSI/ISEA Z87.1 - 2009 Type I standard required and delivers optimum performance in today's advanced environment.

SUPREME COMFORT

A 6 point textile cradle suspension system offers unrivalled comfort without compromising performance.

CHAMLON™ SWEATBAND

Egyptian cotton core with porous PU coating for maximum sweat absorption. PH neutral, dermatologically tested.

3D PRECISION FITTING



Never before has such a precise fit been attainable on an industrial Hard Hat, using the unique 1-2-3 point harness depth settings.

FIRMEST FIT AVAILABLE FOR A HARD HAT

The deep nape strap enables the firmest retention of any Hard Hat, keeping it firmly rooted on the head even when fully inverted.




REVOLUTION™ WHEEL RATCHET
New easy to use wheel ratchet adjustment system to create a firm comfort fit with added security.



ONETOUCH™ SLIP RATCHET
The OneTouch™ Slip Ratchet version of the EVO6100™ is so simple to fit that it can be adjusted with just one finger.

VENTILATION OPTION

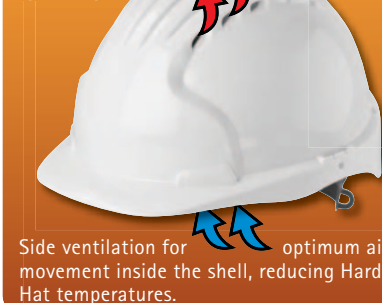

PERFORMANCE		TEMPERATURE RESISTANCE		SHELL MATERIAL		SUSPENSION		OPTIONS			SUSPENSION OPTIONS		CHINSTRAP OPTIONS		LOGO OPTIONS						
Impact Resistance	Electrical Insulation	Molten Metal (MM)	+120F	-22F (EVO6100 Deluxe only)	HDPE	Recyclable	LDPE	Textile	Universal Accessories	Short Brim	Ventilated	Integrated Eyewear	Wheel Ratchet	Slip Ratchet	4 pts	2 pts	Front	Rear	Side	EVO6100™ Deluxe	EVO6100™
54 JOULES	NON-VENTED VERSION						EVO6100™	EVO6100™ DELUXE												40 MOQ	40 MOQ

EVO6100™ RANGE ACCESSORIES

A wide variety of accessories have been designed to fit the EVO6100™. All can be used in conjunction with one another without affecting the performance of each other. This means that the EVO6100™ can be the ideal Hard Hat for a wide variety of environments and tasks.

CODE	DESCRIPTION	DETAILS	IMAGE	BOX QTY
250-EVS-0000	EVOspec™ Polycarb Visor - Clear	Easy assembly kit for those wishing to add retractable eyeshields to their existing EVO6100™ Deluxe Hard Hat. Conforms to ANSI/ISEA Z87.1 - 2010		10
262-AEJ030-50	Surefit Contour™ Hard Hat Mounted Ear Muffs - Blue	Easy to attach and detach with spring loaded arms for excellent fit to ear. When not in use the cups can stand off clearly from the head. SNR=26. NRR =21db		50
281-CS-2PT	Standard	Wide elastic chinstrap with chin cup (deluxe only), releases automatically with forces between 150 and 250 Newtons.		10
281-CSD-2PT	Deluxe			
281-CS-4PT	4 Point Chinstrap	Ideal for working at height, with 4-point chin strap harness.		10

OPTIONAL EXTRAS AVAILABLE IN THE FUTURE

251-01-6225	Surefit™ Visor Carrier	Clips into universal slot and fits both standard and short brim Hard Hats.		20
251-01-6201	Surefit™ 20cm Unbound Polycarb Visor	Offers protection against medium energy high-speed particles at 120 m/s (270 mph), liquid droplets and molten metal. Markings: ANSI/ISEA Z87.1 - 2010 HIGH IMPACT		20
251-01-6211	Surefit™ 20cm Unbound Acetate Visor	Offers protection against low energy high-speed particles at 45 m/s (101 mph) and liquid droplets. Markings: EN166 1.F.3		20