

Anchorage Connectors



Minimum breaking strength of 5,000 lbs.

Compatible for use with MSA fall arrest and confined space entry/retrieval components.

General Purpose



Anchorage Connector Strap

- Standard 5-ft. length; custom lengths available
- D-ring on one end, sewn hoop on other end

PART NUMBER

505282



Double D-ring Anchorage Connector Strap

- Standard 5-ft. length; custom lengths available
- Standard D-ring on one end, large D-ring on other end

PART NUMBER

10023490



Suretyman™ Anchorage Sling

- 1" nylon tube webbing sewn into continuous loop
- Available in 2-ft., 4-ft. and 6-ft. lengths
- Can be hitched to anchorage point using various configurations

| P/N | Description |
|------------|-------------|
| SFP2267402 | 2-ft. sling |
| SFP2267404 | 4-ft. sling |
| SFP2267406 | 6-ft. sling |



Double D-ring Anchorage Connector Strap

- Standard lengths of 3-ft., 4-ft. and 6-ft.
- Standard D-ring on one end, large D-ring on other end
- Integral wear pad

| P/N | Description |
|------------|-------------|
| SFP2267503 | 3-ft. strap |
| SFP2267504 | 4-ft. strap |
| SFP2267506 | 6-ft. strap |



Thermatek™ Anchorage Connector Strap

- Kevlar webbing and stitching
- Contrasting colors of webbing and stitching offer easier inspection
- Includes replaceable wear pad to protect webbing from abrasion
- Heat and burn resistant

PART NUMBER

10023487



Anchorage Cable Sling

- Standard lengths of 2-ft., 4-ft. and 6-ft.; custom lengths available
- Vinyl-coated
- 1/4" galvanized cable

| P/N | Description |
|------------|-------------|
| SFP3267504 | 4-ft. sling |
| SFP2267506 | 6-ft. sling |



PointGuard™ Anchorage Connector Strap—Concrete Construction Model

- Economical
- 400 lbs. (182 kg) capacity
- Standard length of 4-ft.
- Includes protective sheath
- Available with or without steel D-ring
- Meets all applicable OSHA regulations

| P/N | Description |
|----------|---------------------|
| 10042794 | Concrete |
| 10094384 | Concrete, box of 50 |



PointGuard Anchorage Connector Strap—Residential Construction Model

- Economical
- 400 lbs. (182 kg) capacity
- Standard length of 3-ft.
- Available with or without steel D-ring
- Meets all applicable OSHA regulations and ANSI Z359.1

| P/N | Description |
|----------|-------------|
| 10042792 | Residential |



Anchorage Connector Extension

- Standard 5-ft. length
- Vinyl-coated
- 1/4" galvanized cable

| PART NUMBER |
|-------------|
| 505233 |

Because every life has a **purpose...**

Anchorage **Connectors**


Steel—Application: Beams and Rails



Workman® FP Stryder™ Anchorage Connector

- Easy, single-hand installation
- Low friction wear pads with Teflon enable effortless gliding along beam flange
- Lightweight—only 4.5 lbs.!
- Integral load indicator alerts user if unit has been exposed to a fall
- Versatile design: mount overhead or at worker's feet
- Easy to use, push-button adjustment —no pins to lose!
- 400-lb. working capacity

| P/N | Description |
|----------|------------------|
| 10144431 | Standard version |
| 10144432 | XL version |

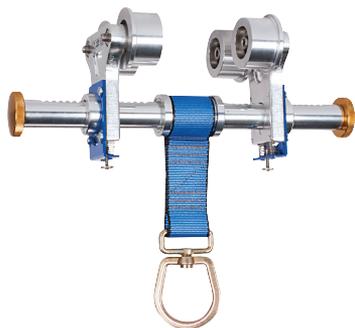

Beam Trolley

- Provides horizontal mobility
- Fits all beams

PART NUMBER

10176450



Rail-Slider™

- Provides fall protection during horizontal movement on railway bridges
- Quick and easy installation
- For 80–136-lb. rail
- Other sizes available

PART NUMBER

SFPRS6000



D-Plate Anchorage Connector

- Provides permanent anchorage point
- Bolts to beams or columns
- Also available with 8" x 8" backplate of black anodized aluminum construction, galvanized steel or stainless steel for attachment to concrete walls

PART NUMBER

506632



Bolt D-ring with Hole

- Permanent anchorage connector
- Attaches to bottom of I-beam flange; user supplies bolt
- Designed for horizontal installation

PART NUMBER

10003213



5K MEGA Swivel

- Max capacity: 5,000 lbs./22kN

P/N Description

10144944 Steel model



10K MEGA Swivel (D-ring only)

- Max capacity: 10,000 lbs./44kN
- Requires PN 10144955 to connect to steel

P/N Description

10129084 Steel model

Steel Bolt Assembly

- For 5,000-lb. or 10,000-lb. MEGA Swivel

P/N Description

10144947 5K bolt assembly

10144955 10K bolt assembly



Weld-on Puck

- Accessory for MEGA Swivel

PART NUMBER

10144958 Includes puck and bolt. MEGA Swivel sold separately.

Concrete



Removable Concrete Anchors

- Quickly and easily removed and reinstalled in another location
- Compact and lightweight
- Durable stainless steel and aluminum construction
- 400-lb. capacity
- 2 models: 5,000-lb. version (5K) and 10,000-lb. (10K) version
- 10,000-lb. version can be used to anchor MSA Dyna-Line® or SureLine™ Horizontal Lifelines
- Can be used to anchor MSA Gravity™ Horizontal Lifelines

PART NUMBER

| | |
|----------|-------------------------------|
| 10081594 | 5K Removable Concrete Anchor |
| 10081570 | 10K Removable Concrete Anchor |



5K MEGA Swivel

- Max capacity: 5,000 lbs./22kN

| P/N | Description |
|----------|----------------|
| 10122945 | Concrete model |



10K MEGA Swivel (D-ring only)

- Max capacity: 10,000 lbs./44kN
- Requires PN 10144956 to connect to concrete

| P/N | Description |
|----------|----------------|
| 10129085 | Concrete model |

Concrete Bolt Assembly

- For 5,000-lb. or 10,000-lb. MEGA Swivel

| P/N | Description |
|----------|-------------------|
| 10144948 | 5K bolt assembly |
| 10122956 | 10K bolt assembly |



MEGA Swivel Hybrid

- Max capacity: 10,000 lbs./44kN.
- MEGA Swivel technology
- Designed for repeated use; durable and 100% retrievable

PART NUMBER

10144957




PointGuard Anchorage Connector Strap—Concrete Construction Model

- Economical
- 400 lbs. (182 kg) capacity
- Standard length of 4-ft.
- Includes protective sheath
- Available with or without steel D-ring
- Meets all applicable OSHA regulations

| P/N | Description |
|----------|-------------|
| 10042794 | Concrete |

Roof

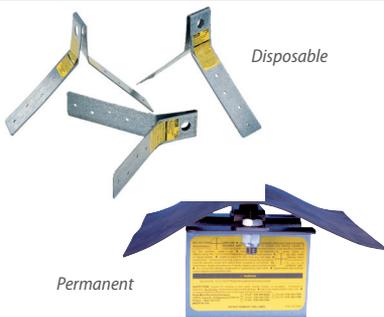

Roof Anchors

- All-steel construction
- Fits all pitches of roof trusses or rafters
- Easy to install without special tools

PART NUMBER

| | |
|----------|------------|
| 416068 | Disposable |
| 10016468 | Permanent |



Workman Reusable Roof Anchor

- Fits up to 12 x 12 roof pitch
- Fastens with screws or nails

PART NUMBER

10102686



PointGuard Anchorage Connector Strap—Residential Construction Model

- Economical
- 400 lbs. (182 kg) capacity
- Standard length of 3-ft.
- Available with or without steel D-ring
- Meets all applicable OSHA regulations and ANSI Z359.1

| P/N | Description |
|----------|-------------|
| 10042792 | Residential |

Carabiners

MSA offers many carabiners for most applications. All carabiners have minimum breaking strength of 5,000 lbs.

| | | | |
|---|--|--|--|
|  <ul style="list-style-type: none"> • 9/16" (14 mm) gate opening • Auto-locking • Steel • ANSI Z, CSA <p>PART NUMBER 10089205</p> |  <ul style="list-style-type: none"> • 3/4" (19 mm) gate opening • Auto-locking • Aluminum <p>PART NUMBER SRCA613</p> |  <ul style="list-style-type: none"> • 7/8" (22 mm) gate opening • Twist-lock • Aluminum <p>PART NUMBER 506259</p> |  <ul style="list-style-type: none"> • 7/8" (22 mm) gate opening • Auto-locking • Steel <p>PART NUMBER 506572</p> |
|  <ul style="list-style-type: none"> • 1" (25 mm) gate opening • Auto-locking with pin • Steel • ANSI Z, CSA <p>PART NUMBER 10089207</p> |  <ul style="list-style-type: none"> • 1" (25 mm) gate opening • Auto-locking • Aluminum <p>PART NUMBER SRCA883</p> |  <ul style="list-style-type: none"> • 1.2" (32 mm) gate opening • Auto-locking • Steel • NFPA <p>PART NUMBER SRCC642</p> |  <ul style="list-style-type: none"> • 1.2" (32 mm) gate opening • Screw-lock • Steel • NFPA <p>PART NUMBER SRCC641</p> |
|  <ul style="list-style-type: none"> • 2.1" (53 mm) gate opening • Auto-locking with pin • Steel • ANSI Z, CSA <p>PART NUMBER 10089209</p> |  <ul style="list-style-type: none"> • 2.1" (53 mm) gate opening • Auto-locking with pin • Aluminum <p>PART NUMBER SRCA722</p> |  <ul style="list-style-type: none"> • 2.1" (53 mm) gate opening • Auto-locking with pin • Steel <p>PART NUMBER 506308</p> |  <ul style="list-style-type: none"> • 2" (51 mm) gate opening • Auto-locking with pin • Steel • ANSI Z, CSA <p>PART NUMBER SRCC740</p> |

Note: This Bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



MSA – The Safety Company
1000 Cranberry Woods Drive
Cranberry Township, PA 16066 USA
Phone 724-776-8600
www.MSAsafety.com

U.S. Customer Service Center
Phone 1-800-MSA-2222
Fax 1-800-967-0398

MSA Canada
Phone 1-800-672-2222
Fax 1-800-967-0398

MSA Mexico
Phone 01 800 672 7222
Fax 52-44 2227 3943