


4ASM

Stub Drill



Type C

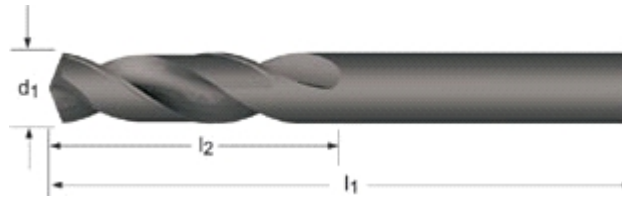

d_1 R mm	d_1 decimal Inch	l_2 mm	l_1 mm	e-code		USD
1.00	0.0394	6	22	4ASM1.0	¹⁾	4.12
1.25	0.0492	8	30	4ASM1.25	¹⁾	4.13
1.30	0.0512	8	30	4ASM1.3	¹⁾	4.16
1.65	0.0650	11	34	4ASM1.65		4.30
2.00	0.0787	12	38	4ASM2.0		3.72
2.30	0.0906	13	40	4ASM2.3		4.16
2.40	0.0945	14	43	4ASM2.4		4.23
2.50	0.0984	14	43	4ASM2.5		3.72
3.00	0.1181	16	46	4ASM3.0		3.72
3.10	0.1220	18	49	4ASM3.1		4.23
3.20	0.1260	18	49	4ASM3.2		3.75
3.30	0.1299	18	49	4ASM3.3		3.75
3.40	0.1339	20	52	4ASM3.4		4.06
3.50	0.1378	20	52	4ASM3.5		3.72
3.70	0.1457	20	52	4ASM3.7		4.84
4.00	0.1575	22	55	4ASM4.0		4.41
4.20	0.1654	22	55	4ASM4.2		4.43
4.50	0.1772	24	58	4ASM4.5		4.84
5.00	0.1969	26	62	4ASM5.0		5.02
5.50	0.2165	28	66	4ASM5.5		6.00
5.70	0.2244	28	66	4ASM5.7		6.94
5.80	0.2283	28	66	4ASM5.8		6.94
6.00	0.2362	28	66	4ASM6.0		6.85
6.20	0.2441	31	70	4ASM6.2		7.14
6.40	0.2520	31	70	4ASM6.4		8.08

d ₁ R mm	d ₁ decimal Inch	l ₂ mm	l ₁ mm	e-code	USD
6.50	0.2559	31	70	4ASM6.5	7.78
6.60	0.2598	31	70	4ASM6.6	8.82
6.80	0.2677	34	74	4ASM6.8	8.67
6.90	0.2717	34	74	4ASM6.9	9.48
7.00	0.2756	34	74	4ASM7.0	8.32
7.20	0.2835	34	74	4ASM7.2	9.57
7.50	0.2953	37	79	4ASM7.5	9.40
8.00	0.3150	37	79	4ASM8.0	10.85
8.10	0.3189	37	79	4ASM8.1	12.40
8.40	0.3307	37	79	4ASM8.4	13.95
8.50	0.3346	37	79	4ASM8.5	12.30
8.70	0.3425	40	84	4ASM8.7	13.95
9.00	0.3543	40	84	4ASM9.0	14.20
9.10	0.3583	40	84	4ASM9.1	15.95
9.20	0.3622	40	84	4ASM9.2	17.20
9.30	0.3661	40	84	4ASM9.3	17.20
9.50	0.3740	40	84	4ASM9.5	15.45
9.70	0.3819	43	89	4ASM9.7	19.00
10.00	0.3937	43	89	4ASM10.0	17.40
10.20	0.4016	43	89	4ASM10.2	18.20
10.50	0.4134	43	89	4ASM10.5	19.05
10.80	0.4252	47	95	4ASM10.8	22.15
11.00	0.4331	47	95	4ASM11.0	19.40
11.20	0.4409	47	95	4ASM11.2	26.05
11.50	0.4528	47	95	4ASM11.5	22.95
11.80	0.4646	47	95	4ASM11.8	27.95
12.00	0.4724	51	102	4ASM12.0	25.20
12.20	0.4803	51	102	4ASM12.2	29.85
12.50	0.4921	51	102	4ASM12.5	25.20

¹⁾Not Split Point